


InteliLite Telecom

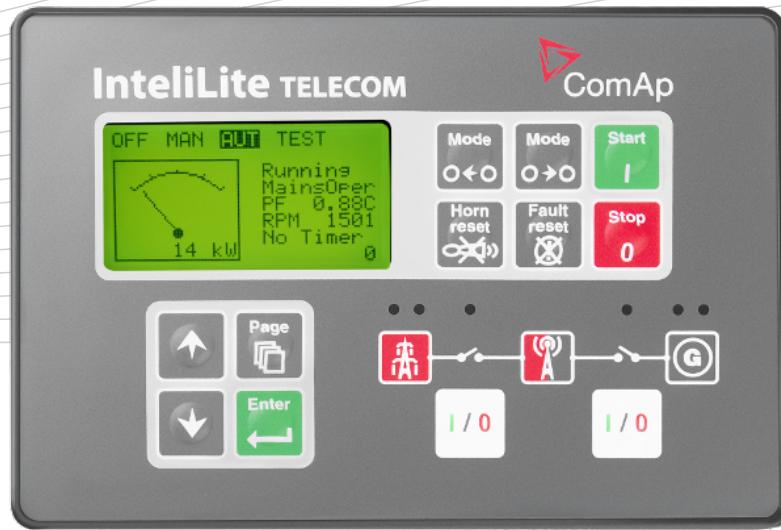

Order code: IL-NT TLC

Datasheet

Auto Mains Failure (AMF) Genset Controller for Telecommunications

Product description




An integrated gen-set controller designed especially for telecom tower applications (both on- and off-grid). In case of power shortage, the controller can operate in a cost-effective cycling operation; in such a situation the power to the load is provided by a battery and the controller is used for battery charging management.

Key features

- ▶ Battery bank voltage sensing and Start / Stop
- ▶ Set of timers for battery bank charging
- ▶ Battery cycling management
- ▶ Fuel measurement and statistics for OPEX evaluation and battery bank maintenance
- ▶ Four additional analogue inputs; One analog output (with optional IL-NT-AIO plug-in module)
- ▶ Remote monitoring and control for optimal service intervals, fault monitoring and reduced operating expenditure
- ▶ Various communication options (Airgate, WebSupervisor, GSM/SMS, GPRS, Ethernet, Alarm emails, SNMP v1) by using optional extension modules
- ▶ Full gen-set monitoring and protection
- ▶ Outstanding EFI engines support with diagnostic messages in plain text via J1939

- ▶ Multiple languages (user changeable) in controller
- ▶ Dual mutual stand-by (Dual AMF) support
- ▶ A / B battery start support

Application overview

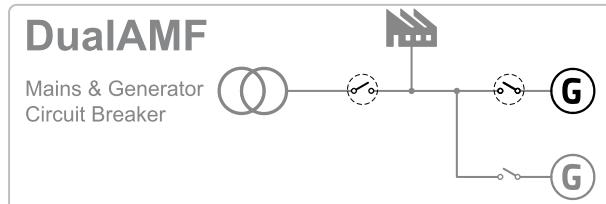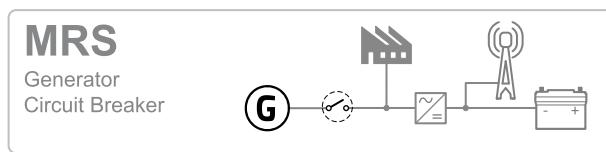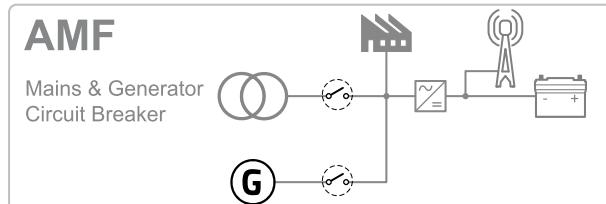

Technical data

Power supply

| | |
|-----------------------------------|----------------------------|
| Power supply range | 8-36 V DC |
| Power supply drop-out immunity | 50 ms (from min. 10 V) |
| Power consumption | 104 mA @ 8 V; 40 mA @ 36 V |
| Backup battery type | CR 1225 |
| Estimated backup battery lifetime | 10 years |
| Max. Power Dissipation | 4W |

Operating conditions

| | |
|--------------------------------------------------------|-----------------------------------------|
| Operating temperature | -20-70 °C |
| Operating temperature (LT version available on demand) | -40-70 °C |
| Operating humidity | 95% non-condensing (IEC/EN 60068-2-30) |
| Protection degree (front panel) | IP65 |
| Vibration | 5-25 Hz, +/- 1,6 mm; 25-100 Hz, a = 4 g |
| Shocks | a _{max} 200 m/s ² |
| Storage temperature | -30-80 °C |

Voltage measurement

| | |
|-----------------------|----------------------------------------------|
| Measurement inputs | 3 ph generator voltage 3 ph mains voltage |
| Measurement type | True RMS |
| Voltage range | 480 V Ph-Ph (277 V Ph-N) |
| Max. measured voltage | 340 V Ph-N |
| Voltage accuracy | 1 % from the range |
| Frequency range | 30-70 Hz, measured from L3 |
| Frequency accuracy | 0,05 Hz |

Current measurement

| | |
|-----------------------|---------------------------|
| Measurement inputs | 3ph generator current |
| Measurement type | True RMS |
| Current range | 5 A |
| Max. measured current | 9 A |
| Max. allowed current | 12 A continuous, 50 A/1 s |
| Current accuracy | 2 % from the range |

Binary inputs

| | |
|-----------------------|----------------------------------------------------------|
| Number | 7 non-isolated |
| Input resistance | 4,2 kΩ |
| Common pole | Positive, V _s = 8-36 V DC |
| Close/Open indication | 0-2 V close contact 4 V - V _s open contact |

Binary outputs

| | |
|-------------------|--------------------------|
| Number | 7 non-isolated |
| Operating voltage | 8-36 V DC |
| Switching to | negative supply terminal |
| Max current | 0,5 A (2 A per group) |

Analog inputs

| | |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Number | 3 non-isolated |
| Electrical range | 0-2500 Ω |
| Resolution | 10 bits, 4 digits |
| Precision | 1 % from the range |
| Supported sensor types | Predefined: VDO 10Bar, VDO Temperature, VDO Fuel level User-defined: 10 points non-linear sensors can be defined by the user |

Communication

| | |
|-----|-----------------------------------------------------|
| CAN | External modules 250 kbps, max 200 m Isolated |
|-----|-----------------------------------------------------|

Magnetic pick-up

| | |
|---------------------------------|-------------------------------------------------------------------------------|
| Voltage input range | 2-70 V _{pp} |
| Frequency input range | 4 Hz-10 kHz (min 2 V _{pp} @ 4Hz - 4 kHz, 6 V _{pp} @ 10 kHz) |
| Frequency measurement tolerance | 0.2 % |


D+

| | |
|-------------------------|--------------------------------------|
| Excitation current | 200 mA, during the engine start only |
| Charging fail threshold | 80 % of U _{supply} |
| Voltage range | 0-60 V (max. 70V) |
| Voltage accuracy | ±0.1 V |

Display

| | |
|------------|------------------------|
| Type | Built-in monochromatic |
| Resolution | 128x64 |


Dimensions, terminals and mounting

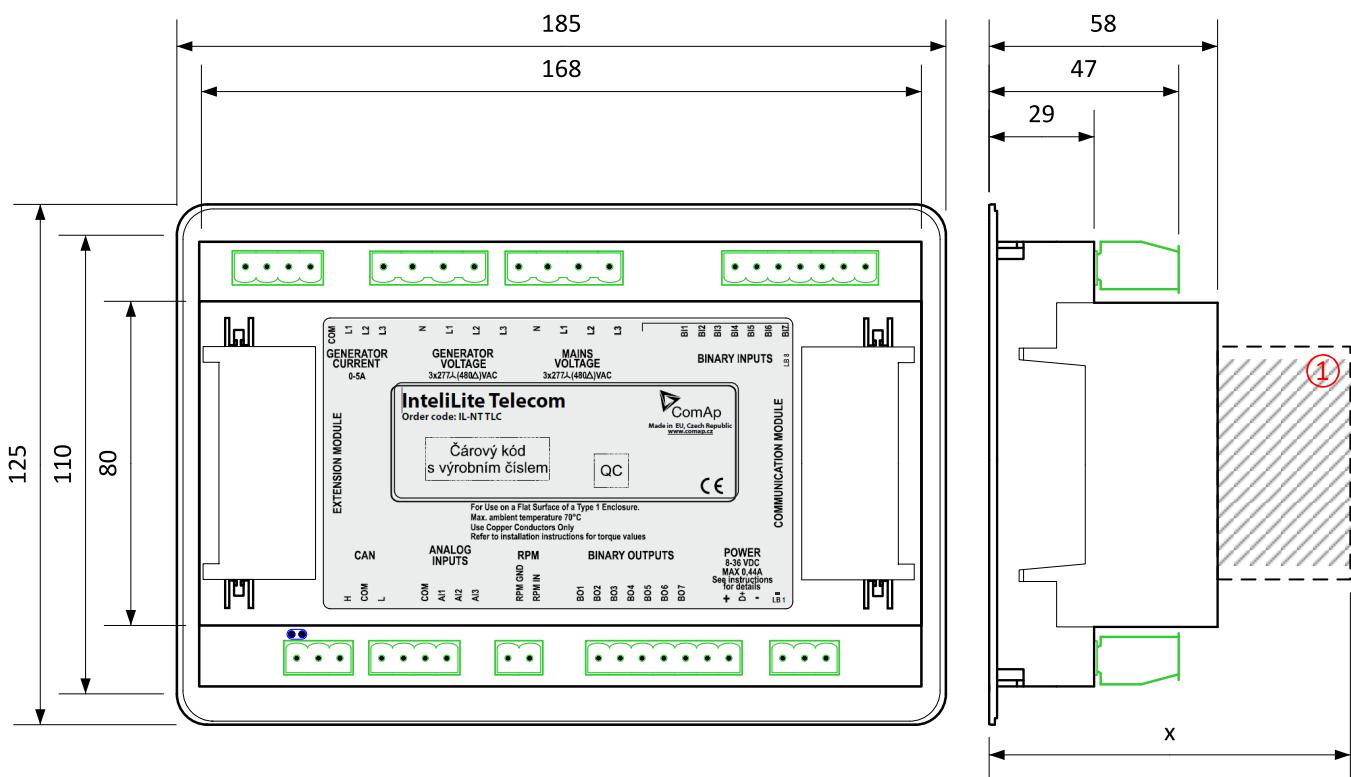

① Plug in module

Note: Dimension x depends on plug-in module

Panel door mounting

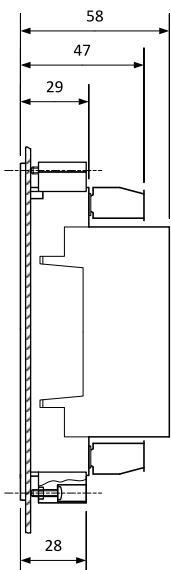

Overview of parameter x

| Plug-in module | Parameter x [mm] |
|-----------------|--------------------------|
| IL-NT-AOUT8 | 75 |
| IL-NT-BIO8 | 74 |
| IC-NT-CT-BIO7 | 76 |
| IL-NT-RS232 | 113 |
| IL-NT-RS232-485 | 115 @ RS232 / 74 @ RS485 |
| IL-NT-GPRS | 122 |
| IL-NT-S-USB | 128 |
| IB-Lite | 108 |
| IL-NT-AIO | 75 |

Note: Parameter x includes reserve for connectors of plug-in modules.

Note: The controller is to be mounted onto the switchboard door. The requested cut-out size is 175x115 mm. Use the screw holders delivered with the controller to fix the controller into the door.

Available extension modules

| Product | Description | Order code |
|-------------------|-----------------------------------------------------------------------------------------|-------------------------------|
| IL-NT-AOUT8 | 8 analog outputs packed in a unit | IL-NT-AOUT8 |
| IL-NT-BIO8 | 8 binary inputs in a unit (HW switchable to 8 binary outputs) | IL-NT-BIO8 |
| IC-NT-CT-BIO7 | 7 binary inputs (HW switchable to 7 binary outputs) and 1 AC current measuring input | IC-NT-CT-BIO7 |
| IG-IOM | 8 binary inputs, 8 binary outputs, 4 analog inputs and 1 analog output in a unit | IG-IOM |
| IGS-PTM | 8 binary inputs, 8 binary outputs, 4 analog inputs and 1 analog output in a unit | IGS-PTM |
| IGL-RA15 | 15 binary LED output (3 colors) packed in a rugged metal unit | IGL-RA15 |
| IL-NT-RS232 | Communication module which provides additional RS232 interface for controller | IL-NT-RS232 |
| IL-NT-RS232-485 | Communication module which provides additional RS232 and RS485 interface for controller | IL-NT-232-485 |
| IL-NT-GPRS | Communication module with integrated GSM modem with GPRS Internet connection | IL-NT-GPRS |
| I-LB+ | Direct connection (PC) to all controllers on CAN2 | I-LB+ |
| InternetBridge-NT | Multiple Internet connections (PC and Modbus) to all controllers on CAN2 or RS485 | IB-NT |
| IL-NT-S-USB | Communication module which provides additional USB interface for controller | IL-NT-S-USB |
| IB-Lite | Communication module which provides additional Ethernet interface for controller | IB-Lite |
| IL-NT-AIO | 4 configurable analog inputs and 1 configurable analog output in a unit | IL-NT-AIO |

Functions and protections

The described product fully supports the following functions and protections as defined by ANSI (American National Standards Institute):

| Description | ANSI code | Description | ANSI code |
|-------------------------------|-----------|-----------------------------|-----------|
| Generator under/overvoltage | 27+59 | Generator overcurrent | 51 |
| Generator voltage asymmetry | 47 | Generator short current | 50 |
| Generator overload | 32 | Generator current unbalance | 46 |
| Generator under/overfrequency | 81L+81H | Earth fault current* | 50N+64 |
| Phase sequence | 47 | Gas (fuel) level | 71 |

*available with optional extension module IC-NT-CT-BIO7

Certificates and standards

- ▶ EN 61000-6-1
- ▶ EN 61000-6-2
- ▶ EN 61000-6-3
- ▶ EN 61000-6-4
- ▶ EN 61010-1



List of standards is available on: <https://webstore.iec.ch/>