



Solenoid Controlled Valve


IR-410-KX

The BERMAD Solenoid Controlled Valve is a hydraulically operated, diaphragm actuated control valve that opens and shuts in response to an electric signal.



Features and Benefits

- Hydraulic Control Valve with Solenoid Control
 - Line pressure driven
 - Electrically controlled On/Off
 - Suitable also for remote and/or elevated systems
- Advanced Globe Hydro-Efficient Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low opening and actuation pressure
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- User-Friendly Design
 - Simple in-line inspection
 - Easy addition of control features

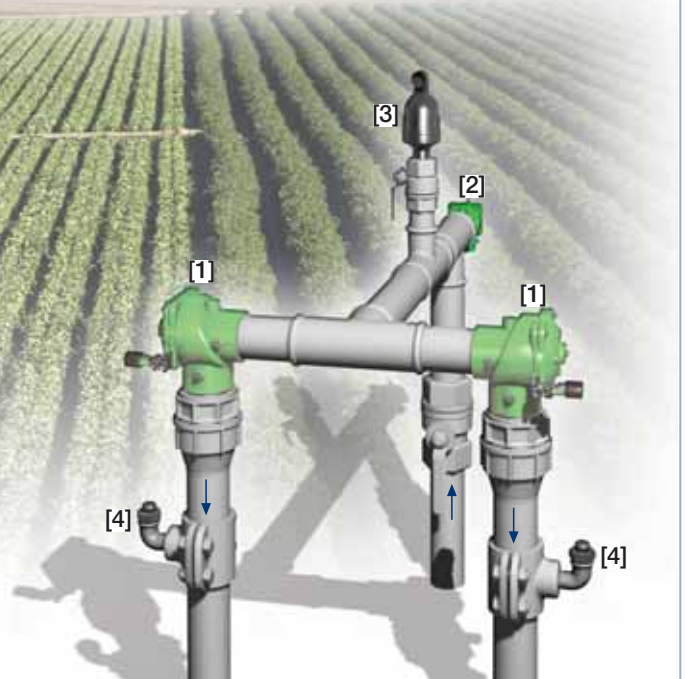

Typical Applications

- Computerized Irrigation Systems
- Remote/Elevated Systems
- Distribution Centers
- Low Supplied Pressure Irrigation Systems


[1] BERMAD Model IR-410-KX opens in response to electric signal.

[2] BERMAD Relief Valve Model IR-43Q-K

[3] BERMAD Air Valve Model ARA-A-P-P

[4] BERMAD Vacuum Breaker Model ½"-ARV

BERMAD Irrigation



400 Series

On/Off Control


IR-4IO-KX

For full technical details, refer to Engineering Section.


Technical Specifications

Dimensions and Weights

Pattern		Globe					
Connections		Threaded					Fl.
Size	DN	40	50	65	80R	80	100
	Inch	1½"	2"	2½"	3"R	3"	4"
Lg	mm inch	153 6	180 7.1	210 8.3	210 8.3	255 10.0	320 12.6
La	mm inch	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
H	mm inch	87 3.4	114 4.5	132 5.2	140 5.5	165 6.5	242 9.5
C	mm inch	52 2	68 2.7	80 3.1	84 3.3	100 3.9	145 5.7
h	mm inch	29 1.1	39 1.5	45 1.8	53 2.1	55 2.2	112 4.4
A; B	mm inch	130 5	130 5	130 5	140 6	175 7	312 12.3
Weight	Kg lb.	2 4.4	4 8.8	5.7 12.6	5.8 12.8	13 28.7	28 61.7

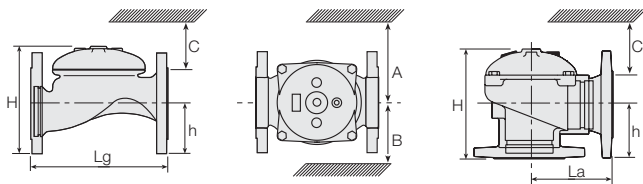

Flow Chart

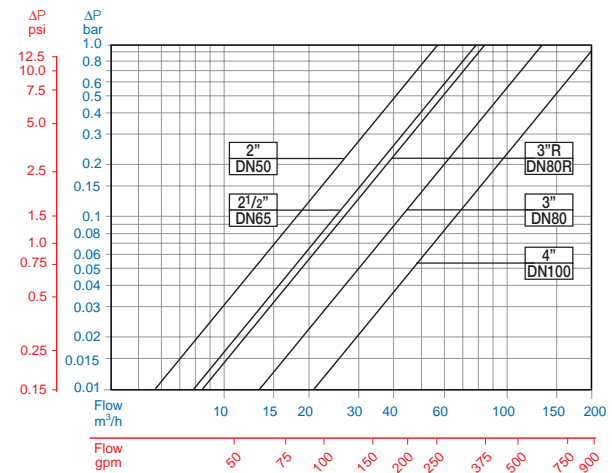

Technical Data

End connections:

Size	1½"	2"	2½"	3"R	3"	4"
	DN40	DN50	DN65	DN80R	DN80	DN100
Threaded	Globe	■	■	■	■	■
	Angle	■	■	■	■	■
Flanged	Globe	■	■	■	■	■
	Angle	■	■	■	■	■
Grooved	Globe	■	■	■	■	■
	Angle	■	■	■	■	■

Pressure Rating: 16 bar; 232 psi

Operating Pressure Range: 0.5-16 bar; 7-232 psi

For lower pressure requirements, consult factory

Solenoid Voltage Range:

S-390 & S-400: 24 VAC, 24 VDC


S-392 & S-402: 9-20 VDC, Latch

S-982 & S-985: 12-50 VDC, Latch

Other Voltages available.

For full electric data, refer to Accessories Section.

Operation

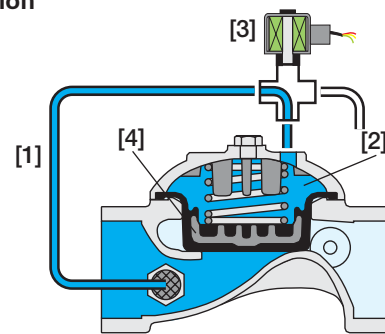

Line Pressure [1] is applied to the Control Chamber [2], through the opened 3-Way Solenoid [3]. This creates superior closing force that moves the Diaphragm Assembly [4] to a closed position. Closing the Solenoid causes it to switch, discharging pressure from the control chamber and thereby opening the main Valve.

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Additional Feature	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage -Main Valve Position	Tubing & Fittings	Additional Attributes
IR	1½"-4" <small>Other sizes available on request.</small>	410	00	-	G	I	BP	PG	4AC	PP	KX
Globe	G	ISO-16	16	9VDC -	Latch	9DS	Plastic Tubing & Fittings			PP	
Angle	A	ISO-10	10	12VDC -	Latch	1DS	Plastic Tubing & Brass Fittings			PB	
		IS 14 (ISO 10/4 Holes)	14	24VDC -	N.C.	4DC					
		ANSI-125	A1	24VDC -	N.O.	4DC					
		JIS-10	J1	24VAC -	N.C.	4AC	Plastic Control Accessories				K
		BST-D	BD	24VAC -	N.O.	4AO	3-Way Control				X
		Grooved	VI	24VAC, Lightning Proof - N.C.	4RC	4RO	Valve Position Indicator ⁽¹⁾				I
				24VAC, Lightning Proof - N.O.	4RO		Flow Stem ⁽¹⁾				M

For available end connections/sizes, see End Connections Table above.

Other electrical ratings are available.

(1) Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M. Other additional attributes are optional. Please consult full-stop



Trädgårdsteknik AB
Helsingborgsvägen 578
262 96 ÄNGELHOLM
Telefon: 0431-222 90
Telefax: 0431-222 70
info@tradgardsteknik.se
www.tradgardsteknik.se
