

FXS4-320L

7,5mt
MANUAL
355°
KOHLER
3000-3600
68 dB(A) @ 7mt

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	320W LED	7,5




The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
625	1550 / 2400	1200	2700 / 7500

ENVIRONMENTAL CONDITIONS	
Temperature	40° C
Height	1000 mslm
Humidity	60,00%

LIGHTING DETAILS

FXS4-320L

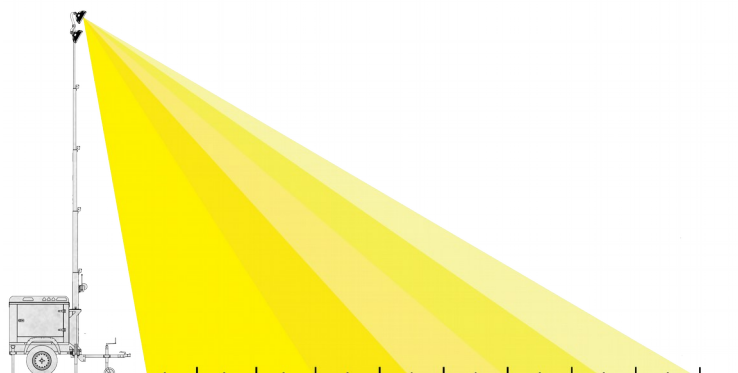

Light

<i>Headlights</i>		4 x 320W
<i>Headlights type</i>		LED
<i>Lumen each</i>	lm	41550
<i>Lightable area</i>	m ²	4500 @ 5 lux

TECHNICAL DETAILS

General

<i>Max height</i>	mt	7,5
<i>Lifting system type</i>		Manual
<i>Rotation</i>		355°
<i>Maximum wind resistance</i>	km/h	100
<i>Prime power</i>	kVA (kW)	4,2 (4,2)
<i>Voltage and frequency</i>	V – Hz	230V – 50Hz
<i>Tank capacity</i>	Lt	40
<i>Autonomy with working headlights</i>	hr	84

Engine

<i>Engine</i>		KOHLER KD350
<i>Engine power</i>	Hp (kW)	5,8 (4,3)
<i>Nr. of cylinders</i>		1
<i>Displacement</i>	cc	349
<i>Aspiration</i>		Nat. Aspirated
<i>Cooling system</i>		Air
<i>Rpm</i>		3000

Alternator

<i>Alternator</i>		LINZ ELECTRIC
<i>Number of poles</i>		2
<i>Type</i>		Brushless
<i>Voltage regulation</i>		Capacitor

STANDARD EQUIPMENT

LIGHTING TOWER

7,5mt height telescopic rod
Telescopic rod with manual lifting system
n.4 320W LED lights
Manual headlights positioning
Electric control panel

GENERAL

Diesel engine
Single-phase alternator
12V battery
First oil filling
68dB(A) at 7mt soundproofed canopy
Slow towing trailer
Service power socket 230V (max 1,8kVA)
n.4 guides for forklift forks
n.4 stabilizers

OPTIONALS

Fast, road-type towing trailer homologated 750kg



Different number, power and kind of lights (halogen, metal halide, led)

Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se