RollcarT-V






RollcarT-V

and irrigation.

The RollcarT-V travels and irrigates on its own. Used mainly for large sized green areas, sport fields, nurseries and gardens. The RollcarT-V starts moving as soon as the water supply is turned on and is slowly drawn along the lawn, along the previously layed out nylon cable. At the end of the designated area the RollcarT-V automatically stops waterflow

The water supply hose with a diametre of 1" and a length of minimum 60 m is drawn behind the cart (The hose is not included with the sprinkler cart RollcarT-V).



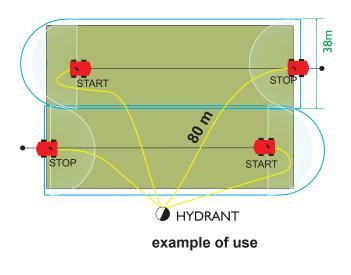

Product avantages



1. Multiuse

The part circle sprinkler allows the operator to define the area to be irrigated. For example irrigation right or left of the sprinkler cart or any sector of a circle can be achieved.

2. Variable waterflow

Through the infinite speed regulation the waterflow can be adjusted to suit each application.

3.Uniform water distribution

The precise distribution of the ZE sprinkler and the constant speed of the RollcarT-V guarantees an optimal water distribution.

4. Maintenance free

The sealed gears have a very low friction factor and are therefore practically maintenance free.

5. Convenience

The compact self contained design makes work with the RollcarT-V mere child's play.

6. Lawn friendly

Using a part circle sprinkler the RollcarT-V always travels on dry lawn.

Technical Data

Travelling speed: 10 to 20 m/h

Minimum operating pressure: 4,0 bar at the inlet

of the RollcarT-V

Pressure loss in 100 m 1" hose: 1,8 bar

Flow rate depending on pressure: 3,0 to 4,3 m³/h Width of irrigation depending on pressure: 33 to 40 m

Length of irrigation: 120 m

Material: Plastic reinforced with fiberglass Overall measurements: 77 x 47 x 40 cm

Total weight: 27,0 kg