

## SPECIAL TRANSPORTER




**SERIE  
SPECIAL TRANSPORTER**

*These Generating Sets from 5 to 20kVA, are special preparations for vans and trucks.  
They are manufactured with a Kohler diesel engine, water cooled, electric 12V starting.  
Coupling with a super-compact generator 400V 3-phases+N or 230V 1-phase - 50 Hz.  
Manual control panel with remote start from inside the truck. Electric distribution panel with ECC sockets available separately.  
These generating sets are supplied without fuel tank, without battery and with separate muffler and electric panel.*

### Generating set

Prime power	[KVA]	10,5
Prime power	[KW]	8,4
Stand-by power	[KVA]	12
Stand-by power	[KW]	9,6
Voltage	[V]	400 / 230
Frequency	[Hz]	50
Cosφ		0,8
RPM	[rpm]	1500
Starting	<b>Electric with battery</b>	
Generating set noise level at 7mt	dB(A)	73

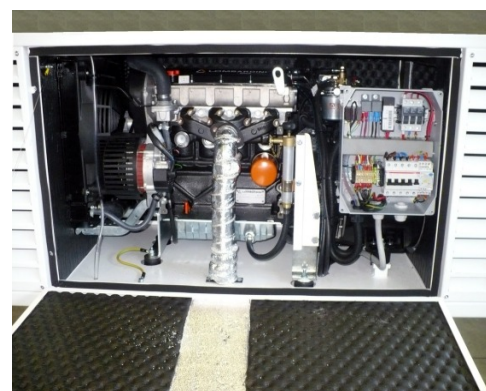








*The image is only for demonstration purposes*

### Dimensions and weight

Lenght	[mm]	1400
Width	[mm]	600
Height	[mm]	700
Weight	[kg]	390

Engine			Alternator	
Manufacturer	KOHLER		Manufacturer	SINCRO or similar
Model	LDW 1404		Poles number	4
Cooling system	Water		Phases number	3
Power	[Hp/kW]	15,1/11	Regulation	AVR
Nr. Of cylinders	4		Type	Brushless
Displacement	[cm³]	1372	Overload accepted	10,00%
Consumption ¾ load	[L/h]	2,6	Voltage accuracy	±1%
Engine oil capacity	[L]	3,2		

## EQUIPMENTS

Standard equipment		Optionals	
	Diesel engine		Soundproof stainless steel canopy painted at 2 components
	Triple-phase alternator		
	First oil filling		
	Soundproof canopy painted at 2 components		
	Vibration dampers		
	Electric manual separated panel with remote start from inside the truck		



Greenpower AB  
 Helsingborgsvägen Varalöv  
 262 96 Ängelholm  
 Tel: 0431-222 40  
 E-mail: [info@greenpower.se](mailto:info@greenpower.se)  
 web: [www.greenpower.se](http://www.greenpower.se)